



# 565-585w

## Draco Module Series

N-TOPCON HIGH EFFICIENCY MONO BM6-16B-G

**Bloomberg**  
NEW ENERGY FINANCE

**Tier1**



### Extraordinary Product Performance


- Up to 30% additional power yield benefited from bifacial technology and up over 80% cell bifaciality
- Competitive high-temperature performance with ameliorated temperature coefficient
- Better weak illumination response, higher power generation with N-TOPCon technology

### Higher Quality Reliability

- Zero Light Induced Degradation(LID), can increase power generation
- Industry-leading cell processing technology and dual glass contributes to excellent anti-PID characteristic
- First-year degradation is less than 1.0%, with linear degradation of 0.4% per year for 30 years

### Wider Application Conditions

- BIPV, vertical installation, snowfield, high-humid area, windy and dusty area
- Safer and easier handling during transportation and installation

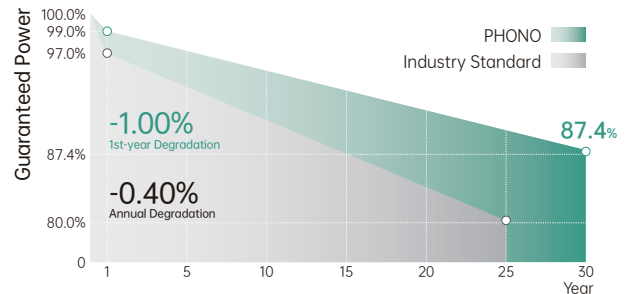

**15-year**  
Product Warranty

**30-year**  
Linear Performance Warranty

### MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730, UL 61730

ISO 9001  
2015 / Quality management system

ISO 14001  
2015 / Standards for environmental management system

ISO 45001  
2018 / International standards for occupational health & safety



## Electrical Typical Values

Model	1000V		PS565M8GF-24/TNH		PS570M8GF-24/TNH		PS575M8GF-24/TNH		PS580M8GF-24/TNH		PS585M8GF-24/TNH	
	1500V		PS565M8GFH-24/TNH		PS570M8GFH-24/TNH		PS575M8GFH-24/TNH		PS580M8GFH-24/TNH		PS585M8GFH-24/TNH	
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)	565	433	570	436	575	440	580	444	585	448	585	448
Rated Current (Imp)	13.24	10.66	13.30	10.71	13.36	10.76	13.42	10.81	13.48	10.86	13.48	10.86
Rated Voltage (Vmpp)	42.68	40.57	42.86	40.74	43.04	40.92	43.22	41.09	43.40	41.26	43.40	41.26
Short Circuit Current (Isc)	13.89	11.19	13.95	11.24	14.04	11.31	14.11	11.36	14.18	11.42	14.18	11.42
Open Circuit Voltage (Voc)	51.49	49.30	51.73	49.53	51.97	49.98	52.20	50.21	52.44	50.44	52.44	50.44
Module Efficiency (%)	21.87		22.07		22.26		22.45		22.65		22.65	

STC(Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

## BSTC

Maximum Power (Pmax)	620	625	630	635	640
Optimum Operating Current (Imp)	14.53	14.58	14.64	14.69	14.75
Optimum Operating Voltage (Vmpp)	42.68	42.86	43.04	43.22	43.40
Short Circuit Current (Isc)	15.24	15.29	15.28	15.33	15.38
Open Circuit Voltage (Voc)	51.49	51.73	52.20	52.44	52.68

BSTC:Front Side Irradiation 1000W/m<sup>2</sup>, Back Side Reflection Irradiation 135W/m<sup>2</sup>, AM 1.5, Ambient Temperature 25°C

## Mechanical Characteristics

Cell Type	N Type Monocrystalline
Dimension (L × W × H)	Length: 2278mm (89.69 inch) Width: 1134mm (44.65 inch) Height: 30mm (1.18 inch)
Weight	32.0kg (70.55 lbs)
Glass	2.0mm/2.0mm toughened glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	12AWG(UL)/4mm <sup>2</sup> (IEC), (+): 450mm,(-): 250mm or Customized Length
Junction Box	IP 68 Rated

## Temperature Ratings

Voltage Temperature Coefficient	-0.25%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.29%/°C
Power Tolerance	0~+3%
NOCT	42±2°C
Bifaciality	80±5%

## Absolute Maximum Rating

Operating Temperature	From -40 to + 85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	II
Fire Rating (UL61730)	Type29
Maximum System Voltage	DC 1000V/1500V

## Packing Configuration

Container	20' GP	40' HQ
Pieces/Container	180	720
Pcs/Pallet	36	36
Pallets/Container	5	20

## Electrical Characteristics

